


FRONT SUSPENSION

TOE: IN / OUT / NONE _____

CAMBER: _____

CASTER: _____

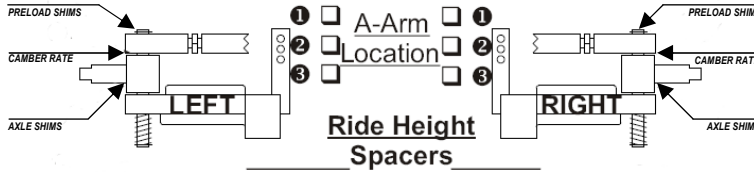

CAMBER: _____

CASTER: _____

WHEELBASE

WHEELBASE

SHORT / LONG / OTHER: _____

SPRING: _____

SPRING: _____

SHORT / LONG / OTHER: _____

MEASUREMENT: _____

LUBE: _____

LUBE: _____

MEASUREMENT: _____

LEADING: _____

PRELOAD SAG: _____


PRELOAD SAG: _____

LEADING: _____

SHOCKS

LEFT SHOCK

RIGHT SHOCK



POSITION: _____

SPRING: _____

OIL: _____

CENTER SHOCK

POSITION: _____

SPRING: _____


OIL: _____

OAL: _____

PISTON: _____

DROOP: _____

BRAND: _____



TIRES

BRAND: _____

COMPOUND

LF _____ RF _____

LR _____ RR _____

DIAMETER:

LF _____ RF _____

LR _____ RR _____

DUROMETER

LF _____ RF _____

LR _____ RR _____

SHADE IN APPLIED AREA:



TRACTION TYPE:

CHASSIS

NOTE: BATT, RX, ESC, LOCATION

BATTERY TRAY

POD WHEELBASE:

SHORT / MEDIUM / LONG

POD POSITION:

STD: _____ OFFSET: _____

T-PLATE:

STD: _____ OFFSET: _____

TYPE: _____

SCREWS USED: _____

REAR STEER SLUGS

0 ___ 1 ___ 2 ___
 3 ___ 4 ___

REAR AXLE

RIGHT REAR HUB

STD ___ OFFSET ___

RIGHT REAR SHIMS: _____

LEFT REAR HUB

.500 ___ .750 ___

LEFT REAR SHIMS _____

AXLE WIDTH:

FROM CENTER: LR _____

TIRE WEIGHTS


LF: _____

RF: _____

* LR: _____

RR: _____

OVERALL: _____

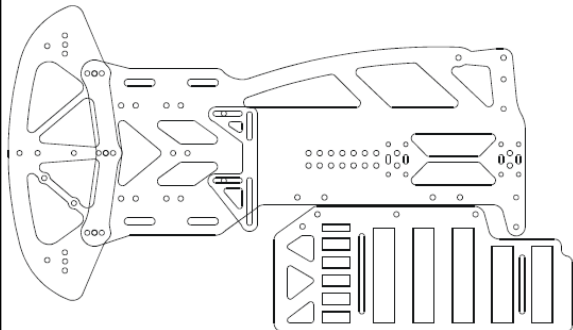

BODY

TYPE: _____

WING

ANGLE: _____

SPOILER HEIGHT: _____

DISTANCE FROM BODY POST TO LEADING EDGE OF WING: _____

POST HEIGHTS:

LF _____

RF _____

LR _____

RR _____

MOTOR

TYPE: _____

ROLLOUT _____

PINION: _____

SPUR: _____

ELECTRONICS

SERVO:

MODEL _____

ST SPEED: _____

DUAL RATE: _____

BATTERY:

4 CELL: _____ 6 CELL: _____ TYPE: _____

NOTES:

